


Steel wire armoured cable BS5467

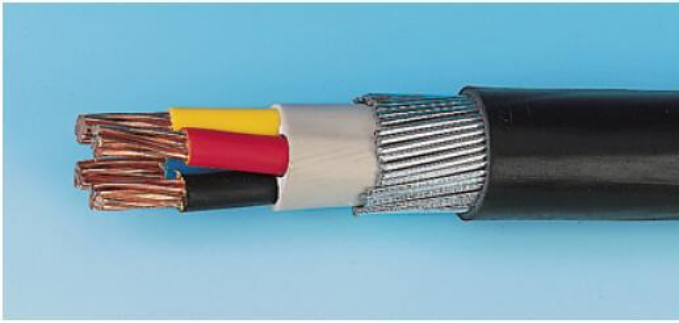

Features:

- Suitable for mains supply electricity and can be used externally or buried.
- Cross linked polyethylene (XLPE) insulated booklet armoured cables benefit from superior thermal and mechanical properties.
- Conforms to: BS6360-conductors, BS6746 Type 9 - Sheath and BS1442 - Armour.

Core colour codes: **2 core** - Red and Black.

3 core - Red, Yellow and Blue.

4 core - Red, Yellow, Blue and Black.

5 core - White with Black numbers.

Red, Yellow, Blue denote phase conductors. Black core denotes neutral.

Specifications:

Conductors	: Stranded annealed Copper.
Insulation	: XLPE (cross linked polyethylene)/PVC.
Bedding	: Extruded PVC .
Armour	: Galvanised Steel wire armour.
Sheath	: PVC.
Voltage	: 600/1000V.
Operating temperature	: -40°C to +90°C.

Specification Table

Core	Size (mm ²)	Reel Weight (kg)	Outer Diameter	Reel Length (m)	Part Number
2 - Core 6942X	1.5	15.3	12.4	50	SWA2C/1.5/50
		34.5		100	SWA2C/1.5/100
	2.5	17.6	13.2	50	SWA2C/2.5/50
	4.0	21.0	14.3		SWA2C/4/50
3 - Core 6943X	1.5	16.9	12.9	100	SWA3C/1.5/50
		37.8			SWA3C/1.5/100
	2.5	19.9	13.8	50	SWA3C/2.5/50
		43.7		100	SWA3C/2.5/100
	4.0	24.1	14.9	50	SWA3C/4/50
	10.0	49.4	18.9		SWA3C/10/50
1.5	19.1	13.7	100		SWA4C/1.5/50
2.5	22.6	14.7		SWA4C/2.5/50	
	49.2		SWA4C2.5/100		
4 - Core 6944X	4.0	28.2	16.2	50	SWA4C/4/50
	6.0	39.8	16.3		SWA4C/6/50
	10.0	57.2	20.3		SWA4C/10/50
	16.0	92.0	26.3		SWA4C/16/50
	2.5	19.5	15.4		SWA5C/2.5/50
5 - Core 6945X	4.0	39.8	19.0	SWA5C/4/50	

Dimensions : Millimetres (Unless Specified)